

ReSound Up Smart™

Because every word matters

ReSound Up Smart™ is a premium hearing aid family for children of all ages and hearing losses. It is a game changer in the way children are granted easy and direct access to the sounds they need for speech and language development. ReSound Up Smart meets or surpasses all pediatric requirements, including safety requirements.

Surround Sound by ReSound™ ensures audibility and consistently clear and comfortable sound, even at high output levels, in all listening situations, due to advanced pediatric features.

As the first pediatric Made for iPhone hearing solution, ReSound Up Smart 9, 7 and 5 receives stereo sound directly from an iPhone, iPad or iPod touch to benefit listening and language learning in more fun ways for infants and pre-schoolers, and to provide educational and social media interaction possibilities for older children and teens. And with the ReSound Smart™ app, the child or the parent can adjust the hearing aids easily, discreetly and intuitively from iOS devices.

ReSound Up Smart offers a line-up of modern and powerful wireless BTEs for mild to profound hearing losses with attractive colour options.

Product features

- Wireless connectivity to ReSound Unite accessories
- Wireless ear-to-ear connectivity
- Full iSolate™ nanotech coating
- Supports Power and High Power configurations
- Push button and programmable Volume Control
- Size 13 battery
- Battery door with integrated On/Off switch
- Advanced, auto-locking battery door
- LED visual indication
- Telecoil with T and MT modes

Options

- 12 different colour combinations
- Direct audio input or integrated FM
- Support standard earmold fittings
- Standard hook, Child hook, Baby hook, and Adult and Baby metal hook

Fitting software

- Aventa fitting software (3.10 or higher)
- Wireless fitting interface: Airlink™
- Speedlink, HI-Pro, or NOAHlink programming interfaces
- Programming adaptor with CS44 socket cable

UPS988-DLW
UPS788-DLW
UPS588-DLW
UPS588M-DLW




ReSound Up Smart 9
ReSound Up Smart 7
ReSound Up Smart 5


	ReSound Up Smart 9	ReSound Up Smart 7	ReSound Up Smart 5
ReSound SmartRange chip	●	●	●
Surround Sound by ReSound			
Model			
WARP™ Compression - number of bands	17	17	9
Environmental Classifier	●	●	●
Sound Shaper™	●	●	●
Low Frequency Boost	●	⊙	○
Clean			
NoiseTracker™ II	●	⊙	○
Personalized Noise Reduction	●	●	●
WindGuard™	●	⊙	○
Expansion	●	⊙	○
Balance			
Binaural Directionality™	●	●	●
Directional Mix Processor	●	●	●
- Adjustable directional mix	●	●	●
Natural Directionality™ II	●	●	●
Synchronized SoftSwitching™	●	●	●
SoftSwitching™	●	●	●
AutoScope Adaptive Directionality™	●	●	●
MutiScope Adaptive Directionality™	●	●	●
Adaptive Directionality	●	●	●
Binaural Environmental Optimizer™ II	●	●	●
Environmental Optimizer™ II	●	●	●
Environmental Optimizer™	●	●	●
Stabilize			
DFS Ultra™ II	●	●	●
- Music Mode™	●	●	●
Auto DFS™	●	●	●
Convenience Features			
Synchronized Push Button	●	●	●
Synchronized Volume Control	●	●	●
SmartStart™	●	●	●
PhoneNow™	●	●	●
Comfort Phone™	●	●	●
iSolate™ nanotech	●	●	●
Fitting Features			
Gain Handles	9	9	9
Fully Flexible Programs	4	4	4
Synchronized Acceptance Manager	●	●	●
Onboard Analyzer™ II	●	●	●
Amplification strategy (WDRC/Semi.linear/Linear)	●	●	○
In Situ Audiometry	●	●	●
Wireless connectivity			
2.4 GHz Wireless Technology	●	●	●
2.4 GHz ear-to-ear communication	●	●	●
Direct audio streaming (Made for iPhone)*	●	●	●
Wireless fitting with Airlink™	●	●	●
ReSound Unite™ TV Streamer 2	●	●	●
ReSound Unite™ Remote Control 2	●	●	●
ReSound Unite™ Phone Clip+	●	●	●
ReSound Unite™ Mini Microphone	●	●	●
ReSound Control™ app (Phone Clip+ required)	●	●	●
ReSound Smart™ app*	●	●	●

*Available in UPSM588-DLW

Fitting range



Fitting range

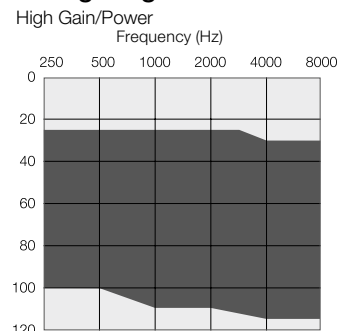

ReSound

rediscover hearing



ReSound Up Smart is compatible with iPhone 6s Plus, iPhone 6s, iPhone 6 Plus, iPhone 6, iPhone 5s, iPhone 5c, iPhone 5, iPad Pro, iPad Air 2, iPad Air, iPad (4th generation), iPad mini 4, iPad mini 3, iPad mini 2, iPad mini and iPod touch (5th generation) using iOS 7.X or later. Apple, the Apple logo, iPhone, iPad, iPad Air, iPad mini and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.


ReSound Up Smart™

Technical specifications


		UPS88-DLW POWER UPS88M-DLW POWER		UPS88-DLW HIGH GAIN/POWER UPS588M-DLW HIGH GAIN/POWER	
		IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler	IEC 60118-0 IEC 711 Ear simulator	IEC 60118-7 2cc coupler
Reference test gain (60 dB SPL input)	1600 Hz/HFA	55	51	57	50
Full-on gain (50 dB SPL input)	Max.	74	67	80	72
	1600 Hz/HFA	66	62	72	68
Maximum output (90 dB SPL input)	Max.	139	131	139	131
	1600 Hz/HFA	133	128	133	128
Total harmonic distortion	500 Hz	1.2	1.0	1.3	0.7
	800 Hz	0.8	0.4	0.7	0.4
	1600 Hz	0.7	0.5	0.5	0.4
Telecoil sensitivity (1 mA/m input)	Max.	101	-	107	-
Full-on telecoil sensitivity @ 1mA/m	HFA	94	92	99	98
HFA-SPLIV Telecoil sensitivity @ 31.6 mA/m(ANSI)	1600 Hz / HFA	-	111	-	111
Equivalent input noise w/o Noise reduction		23	20	23	21
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	-	9	-
Frequency range (DIN 45605)		100-7080	100-6170	100-6240	100-4960
Current Drain (Quiescent / Operating)		1,1 / 1,2	1,1 / 1,2	1,1 / 1,2	1,1 / 1,1

Data in accordance with IEC 60118-0, IEC 60118-7;
Supply Voltage 1.3 V.

Maximum Output (OSPL 90)

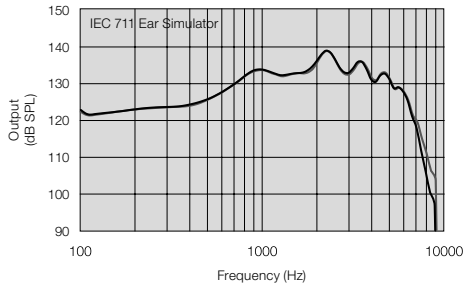


Maximum Output (OSPL 90)

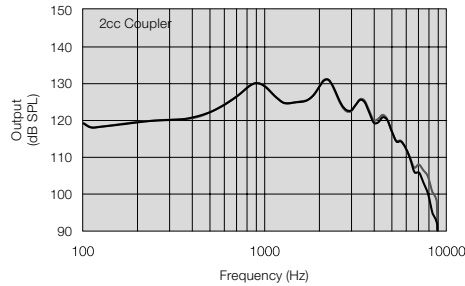


Notes:
O.E.S. = Occluded Ear Simulator
2cc = 2 cm³ coupler
Pi = Acoustic input signal

Basic settings:
Full-on Gain, Reference Test Gain
MPO = Maximum Peak Output
Maximum Band Width

Full-On and Reference Test Gain

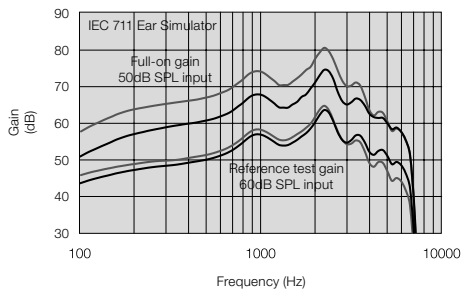


Full-On and Reference Test Gain

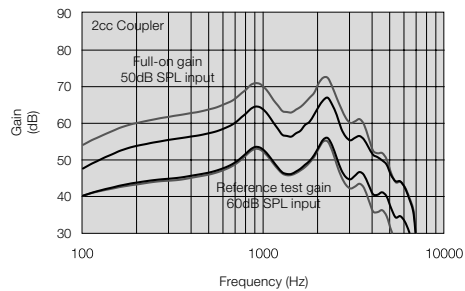


Measured according to IEC 60118-0 1983, amendment 1994; at 1.3 V, impedance 6.2 ohms and 23°C on O.E.S. according to IEC711 1981, resp on 2cc according to IEC60118-7 2nd edition 2005 (DIN average calculated at 500 Hz, 1000 Hz and 2000 Hz; HFA average calculated at 1000 Hz, 1600 Hz and 2500 Hz; 0 dB SPL sound pressure equals 20µPa). All measurements without DSP features activated unless indicated otherwise.

Input/Output Response



Telecoil response

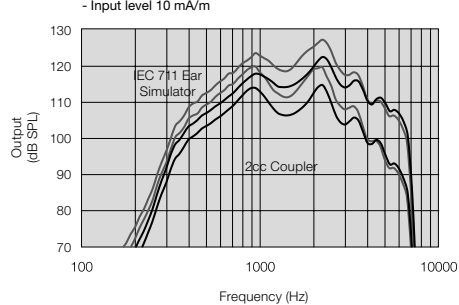

■ High Power
■ Normal Power

Patents pending

All specifications are subject to change without notice

400311000-GB-15.09-Rev.D

Worldwide headquarters
ReSound A/S
Lautrupbjerg 7
DK-2750 Ballerup, Denmark
Tel.: +45 45 75 11 11
Fax: +45 45 75 11 19
www.resound.com
CVR no. 55082715

United Kingdom
GN ReSound Ltd.
Kirtlington Business Centre
Portway
Kirtlington
Oxon OX5 3JA
Tel.: +44 1869 352 800
Fax: +44 1869 343 466
www.gnresound.co.uk

Australia
GN ReSound Pty. Ltd.
Gate C, 19-25 Khartoum Rd
Macquarie Technology Park
Macquarie Park NSW 2113
Tel.: (free) 1800 658 955
www.gnresound.com.au

New Zealand
GN ReSound (NZ) Ltd.
Ground Floor, North Entrance
4 Fred Thomas Drive
Takapuna
Auckland, 0622
Tel.: (free) 0800 900 126
Fax: (free) 0800 007 695
www.gnresound.co.nz

ReSound

rediscover hearing